


Motor brake relay AR 9021  
ministop




0224437

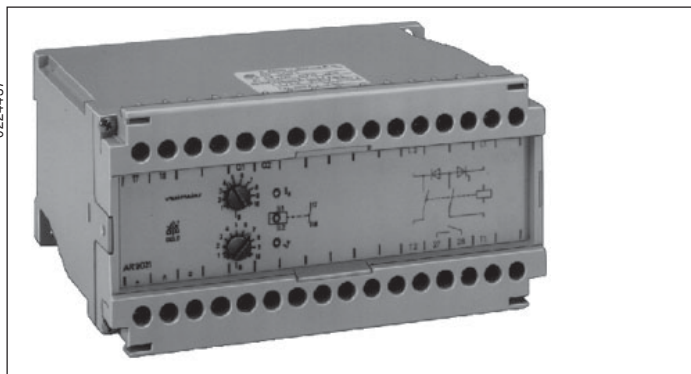

- Thyristor electronic motor brake relay for motors up to 5,5 kW
- Adjustable braking current, optional up to max. 26 A
- Adjustable braking time, optional up to max. 60 s
- Internal braking contactor
- Optional with standstill monitoring
- Optional with protection against overtemperature
- Width 150 mm

Function diagram

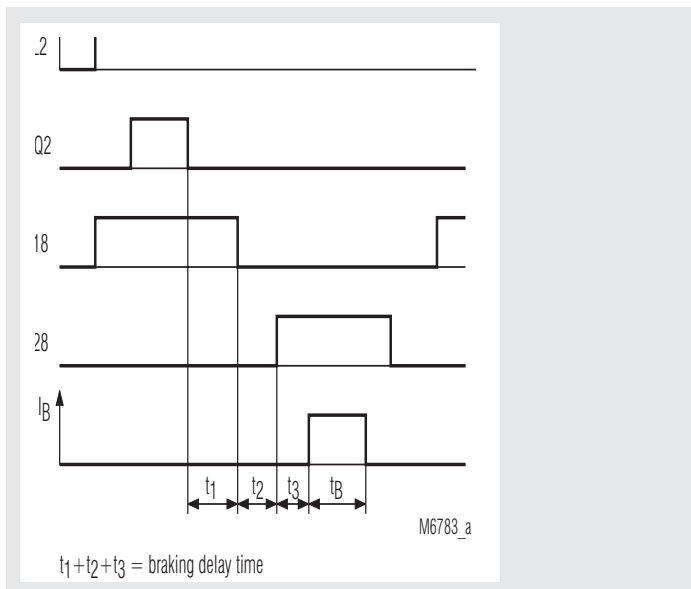

Approvals and marking



Applications


- DC-brake for squirrel cage motors in:
- woodworking machines
  - centrifuges, conveyor belts
  - mills, grinding machines
  - shaker conveyors

Construction and action

With the supply voltage connected to terminals L1-L2, the interlock contact 17-18 for the motor contactor is closed. A red LED indicates that supply voltage is present. The motor can be started by the "ON" button. The DC braking current can be collected at the T1 and T2 terminals.

The relay operates in the following manner:  
When the motor contactor has been deenergized, the braking current contactor is closed, after a fixed safety time delay to allow inductive voltages to decay. After that the braking current is flowing through the stator windings for the set braking time.

Circuit diagram

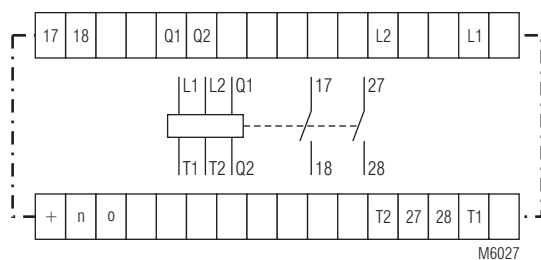

Indicators

- LED red (L1/L2): supply voltage is present
- LED red (∅): thermal protection has responded
- LED green (I<sub>B</sub>): braking current is present

Notes

Because the DC braking current is produced by a phase controlled thyristor rectification circuit and the DC current is a product of the supply voltage applied to L1-L2 and the winding resistance, the max. current can be significantly larger than the permissible current, if the potentiometer is turned to right end.

Standstill is monitoring at 3 Hz. One mark for the proximity switch is equivalent to 180 rpm. With more marks the standstill speed can be reduced.

Technical data

Input

- Nominal voltage L1, L2:** AC 24, 110, 230, 240, 400, 415, 440, 480, 500 V
- Voltage range:** 0,8 ... 1,1 U<sub>N</sub>
- Nominal frequency:** 50 / 60 Hz
- Nominal consumption:** 5 VA

Output

- Contacts:** 2 NO contacts
- Rated motor power:** 4 kW at 400 V

## Technical data

**Permissible braking current:** 0,2 ... 16 A  
**DC braking voltage (RMS):** 0,695 x nominal voltage  $\pm 5\%$   
**Braking time:** 3 s, 10 s, 20 s, 60 s  $\pm 10\%$   
**Braking delay time:** 300 ms  $\pm 20\%$   
**Percentage load factor (ED):**

Temperature	Braking current $I_b$		
	6 A	12 A	16 A
20°C	100 %	40 %	25 %
30°C	82 %	33 %	20 %
40°C	62 %	25 %	17 %
50°C	40 %	17 %	11 %
55°C	31 %	14 %	9 %

$$ED = \frac{\text{braking time}}{\text{period of switching cycle}}$$

## Switching capacity of the monitoring contacts to AC15:

**Fuse, superfast:** 5 A / AC 230 V IEC/EN 60 947-5-1  
 16 A  
 25 A at variant /200  
**Mechanical life:** 30 x 10<sup>6</sup> switching cycles  
 EN 60 947-5-1

## General data

**Temperature range:** - 20 ... + 55 °C  
**Storage temperature:** - 25 ... + 70 °C  
**Clearance and creepage distances**  
 overvoltage category/  
 contamination level: 4 kV / 2 IEC 60 664-1  
**EMC**  
 Electrostatic discharge: 4 kV (air) IEC/EN 61 000-4-2  
 Fast transients: 4 kV IEC/EN 61 000-4-4  
 Surge voltages between  
 wires for power supply: 2 kV IEC/EN 61 000-4-5  
 between wire and ground: 4 kV IEC/EN 61 000-4-5  
**Degree of protection:** Housing: IP 40 IEC/EN 60 529  
 Terminals: IP 20 IEC/EN 60 529  
**Housing:** Thermoplastic with V0 behaviour  
 according to UL subject 94  
**Vibration resistance:** Amplitude 0,35 mm  
 frequency 10...55Hz IEC/EN 60 068-2-6  
**Wire connection:** 2 x 2,5 mm<sup>2</sup> solid or  
 2 x 1,5 mm<sup>2</sup> stranded ferruled  
 DIN 46 228-1/-2/-3  
**Wire fixing:** Flat terminals with self-lifting  
 clamping piece IEC/EN 60 999-1  
**Mounting:** DIN rail IEC/EN 60 715  
**Screw-fixing:** 50 x 135 mm and 60 x 135 mm  
 DIN 46 121  
**Weight:** 850 g

## Dimensions

**Width x height x depth:** 150 x 78 x 115 mm

## Standard type

AR 9021 AC 400 V 50/60 Hz 16 A 10 s  
 Article number: 0027199 stock item  
 • Nominal voltage  $U_N$ : AC 400 V  
 • Max. braking current: 16 A  
 • Braking time: 10 s  
 • Width: 150 mm

## Variants

AR 9021/100: Temperature monitoring of the power rectifiers  
 AR 9021/110: Standstill monitoring by proximity switch  
 AR 9021/120: Temperature and standstill monitoring  
 AR 9021/150:  $Q_1$ ,  $Q_2$  operates like NC-contact  
 $t_v = 100$  ms,  $t_b = 3$  s  
 AR 9021/200: Braking current up to 26 A, external braking contactor necessary  
 AR 9021/201: wie AR 9021/200 mit Mehrgangpoti

## Variants

AR 9021/300: Interruption of the braking current via  $Q_1/Q_2$

## Ordering example for Variants

AR 9021 / \_ \_ \_ AC 400 V 50/60Hz 16 A 10 s  
 Braking time  
 max. braking current  
 Nominal frequency  
 Nominal voltage  
 Variant, required  
 Type

## Control input

If the connection between  $Q_1$ - $Q_2$  is made, the device turned into standby mode. After opening the connection, the device starts with braking.

## Monitoring output

17, 18: interlock contact for motor contactor  
 27, 28: activation of braking contactor

## Adjustment facilities

Potentiometer	Description	Fundamental adjustment
$I_b$	braking current	left position
$t_b$	braking time	mid position

## Commissioning

The braking time  $t_b$  has to be determined experimentally. Braking current  $I_b$  is adjusted to be 1,8 ... 2 times the rated motor current  $I_N$ . If the motor stops and hums the time  $t_b$  is too long. If motor is still turning after time  $t_b$  has elapsed,  $t_b$  is too short and has to be increased.

In the basic circuit braking current  $I_b$  is injected into one stator winding. For high inertia applications braking current  $I_b$  should be injected into two or more stator windings. Combining 2 stator windings with the built-in contact 27-28 increases braking efficiency for the same braking current  $I_b$ . If contact 27-28 is used to switch an aux. relay also 3 stator windings may be connected in line.

## Braking with time delay $t_b$ and current $I_b$

As soon as relay S1 opens it is recognized by the motor brake via the inputs  $Q_1$ - $Q_2$  (contact opening principle). After a fixed delay of approx. 80 msec. the braking current  $I_b$  is injected for the duration of the set braking time  $t_b$ . During this time contacts 17-18 are opened to prevent the motor contactor energizing while braking. The lit green LED  $I_b$  indicates the presence of the braking current  $I_b$ . After  $t_b$  has elapsed the current  $I_b$  is switched off, the green LED  $I_b$  extinguishes and contacts 17-18 closes. The motor can be restarted.

## Braking with standstill monitoring

Under certain running conditions the rise in temperature of the stator windings may cause the actual braking time  $t_b$  to standstill to be less than the time set under cold conditions. The speed condition may be used to override time by connecting a proximity switch to terminals "+", "n" and "o" with potentiometer  $t_b$  set to maximum. When standstill is registered the brake relay switches off after 300 msec. As a safety feature, should the sensor fail, the brake relay will continue to time out and switch off when the max. set time is reached.

## Overtemperature protection


It is possible under very arduous operating conditions that the relay power components will overheat. A thermal cut-out will disconnect the brake relay and by opening contacts 17-18 prevent reenergization of the motor until a suitable cooling period elapses. A red LED ( $\vartheta$ ) indicates the overheat condition.

Response temperature: 90 ... 95 °C  
 Hysteresis: approx. 5 %


## Safety instructions

- Never clear a fault when the device is switched on
- The user must ensure that the device and the necessary components are mounted and connected according to the locally applicable regulations and technical standards
- Adjustments may only be carried out by instructed specialist staff, while the applicable safety rules must be observed.

## Application example

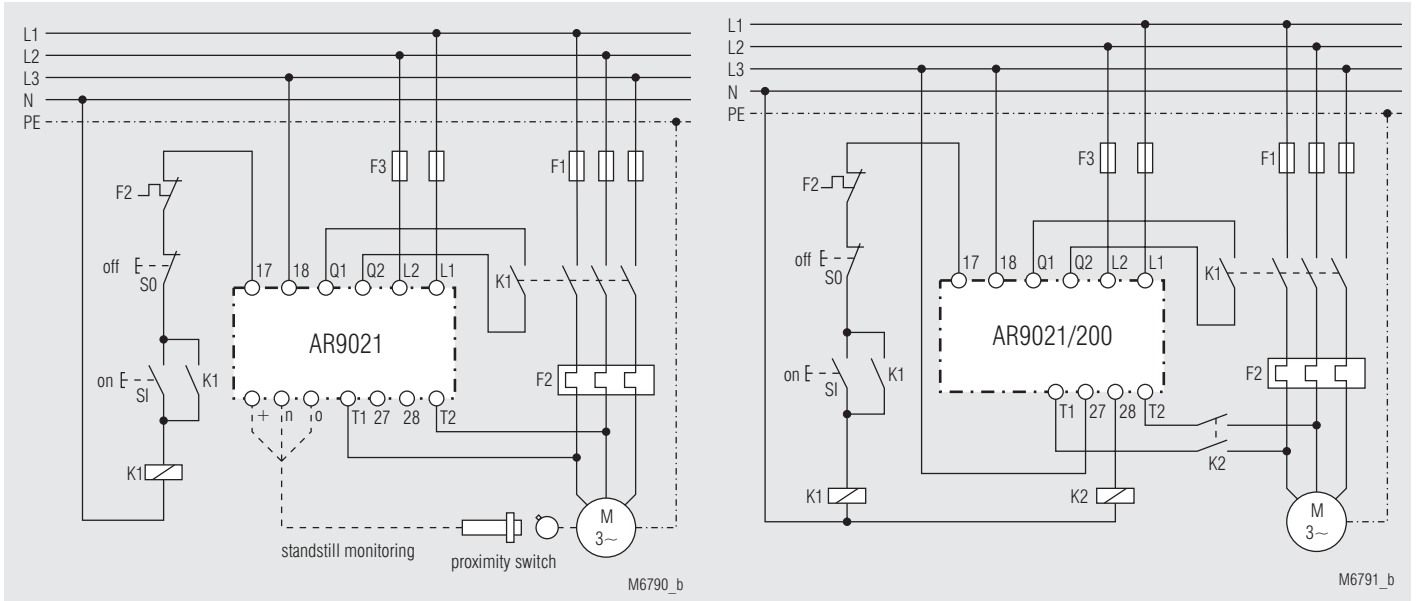


## Application example

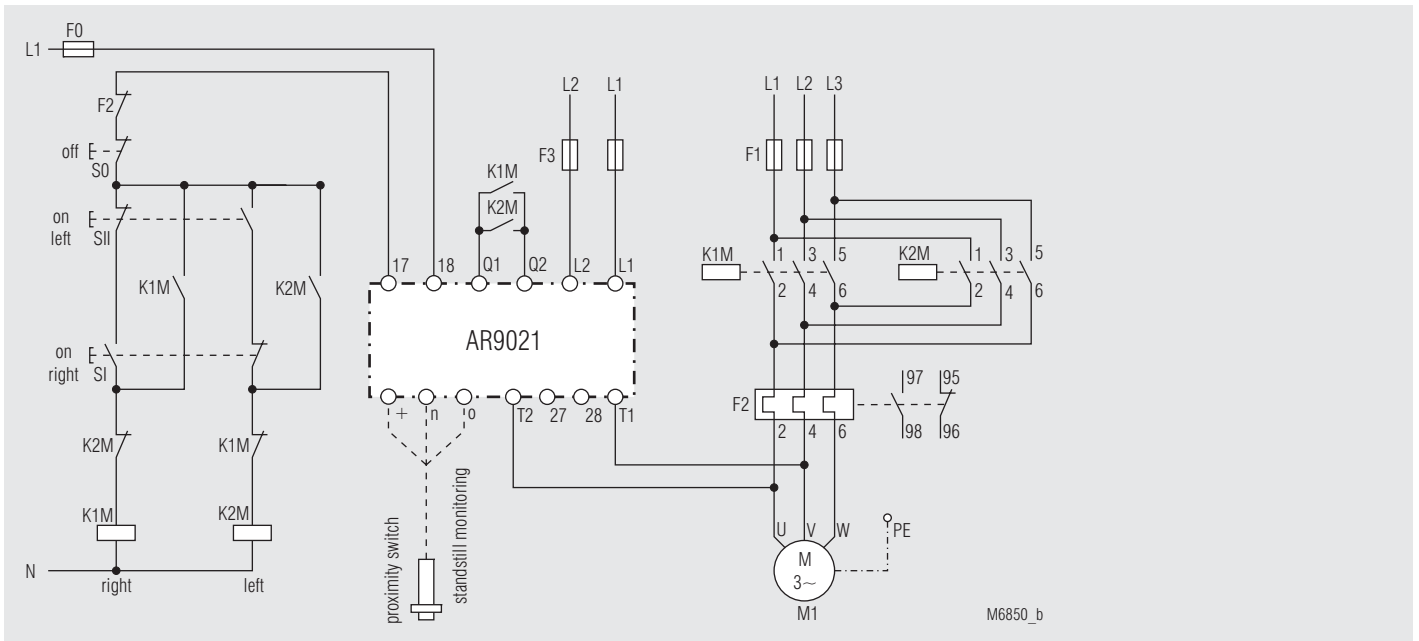


Reversing control connection (direct switching). Braking while turning left or right with AR 9021

## Application example

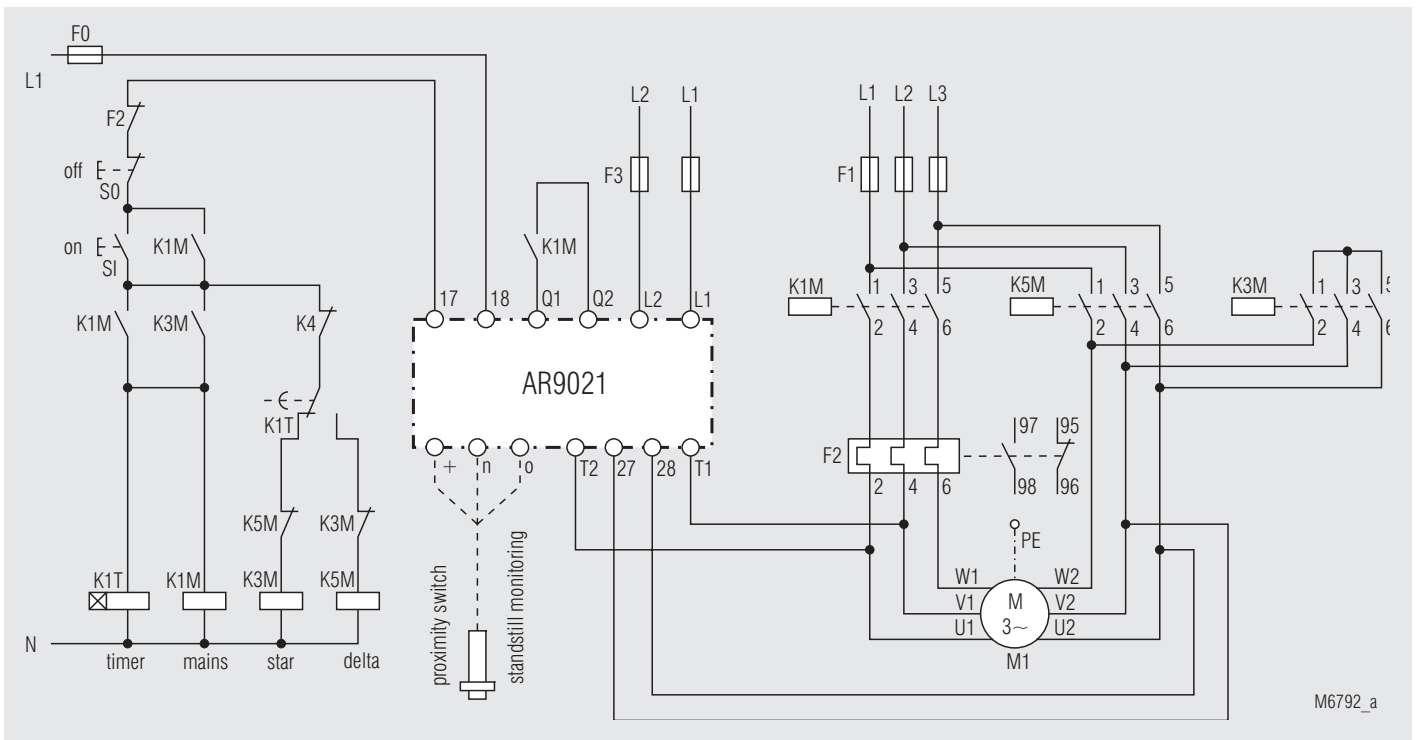


Y - Δ - control, braking with AR 9021

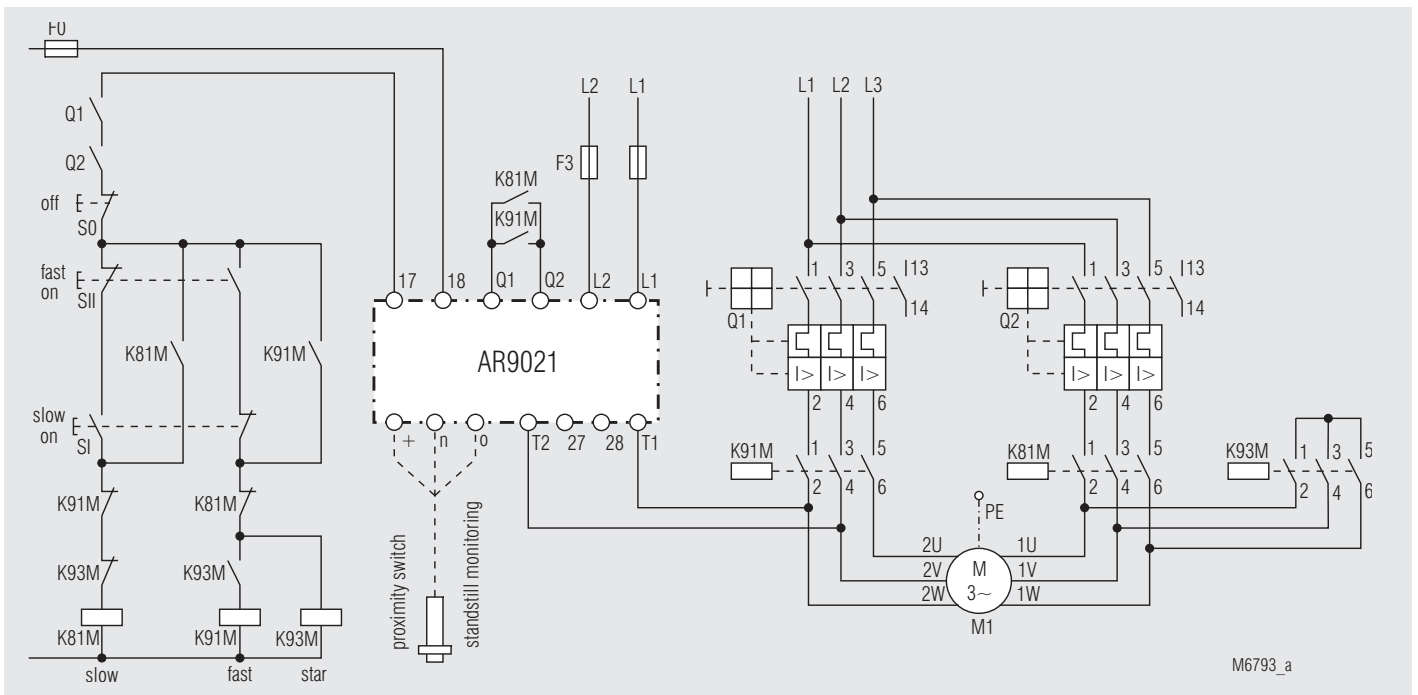


Dahlander Control Circuit, braking of low and high revolutions with AR 9021

### Application example

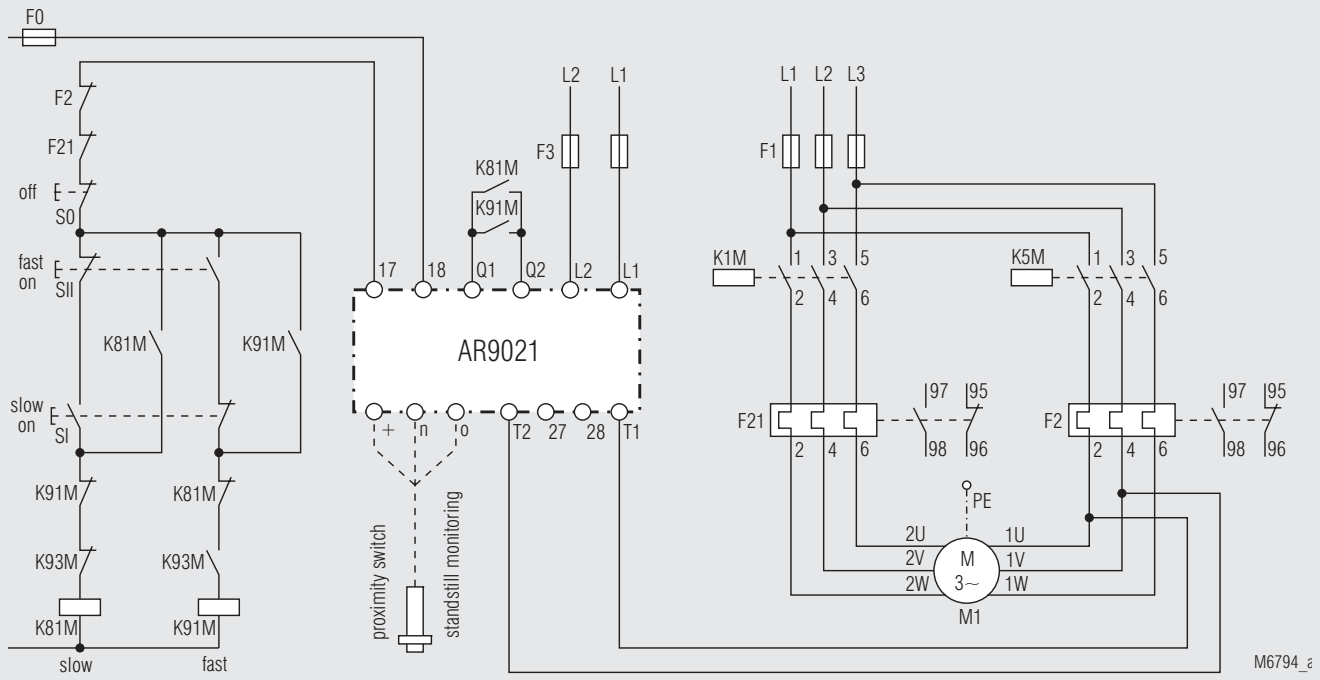

M6794\_ε

Pole commutation (separate windings), braking of low and high revolutions with AR 9021

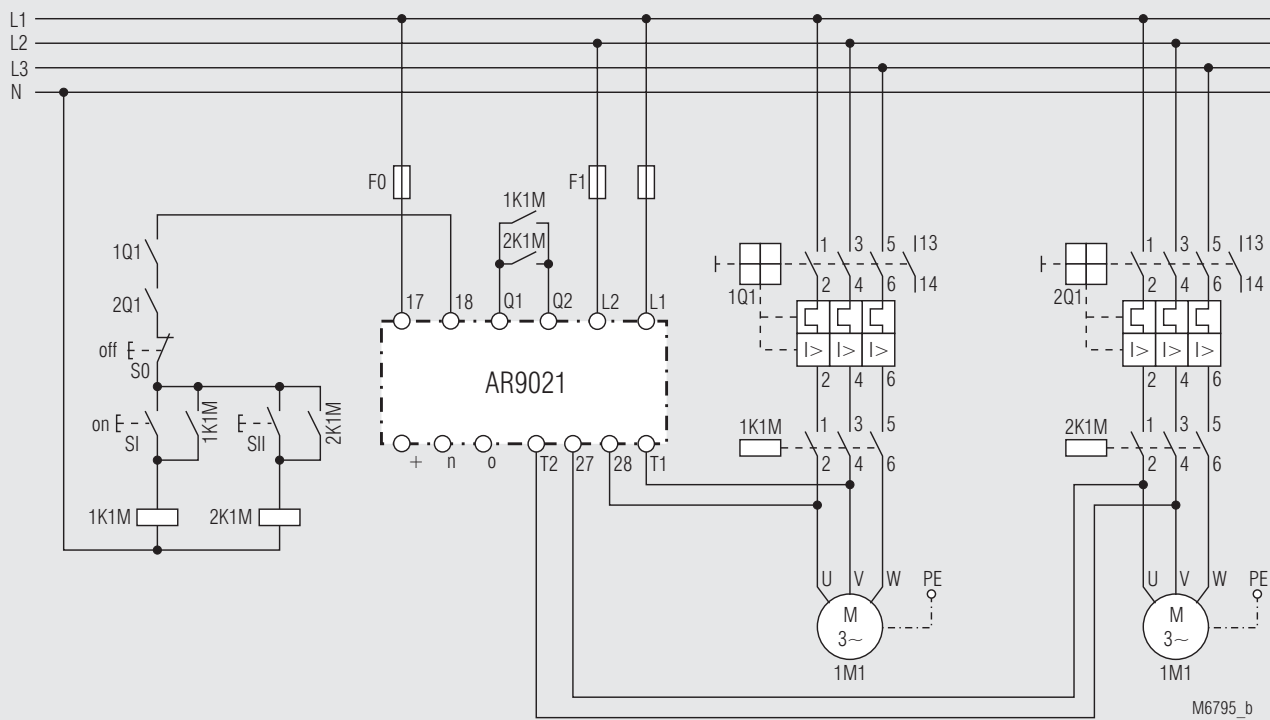

M6795\_b

Multi motor braking (2 motors switched in series) with AR 9021. Braking circuit must be adhered to.

