

KEL-JUMBO

for cables up to 65 mm



KEL-JUMBO 2 Art. No. 42350

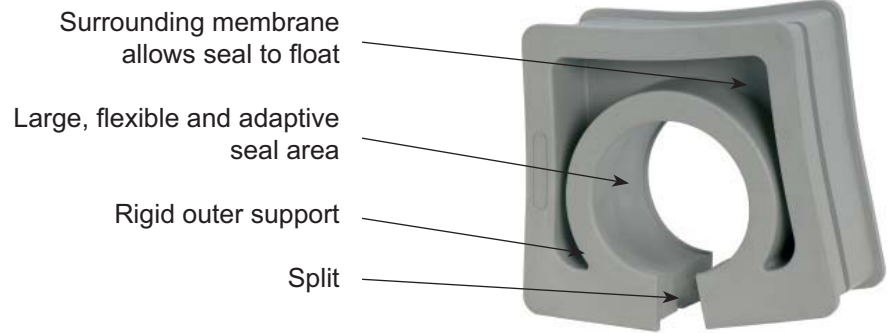


KEL-JUMBO 1 Art. No. 42360

The KEL-JUMBO cable entry system for installation of cables and conduits up to Ø 65 mm

- ❑ Simple assembly
- ❑ Insert design allows dynamic and flexible movement
- ❑ Ideal for retrofits
- ❑ KTF-insert system allows the insert to follow, to a great extent, any "bending" of the cable
- ❑ No metal surcharge

The product has 4 main features:



We recommend round cutouts, which can be made using standardised tools.

As hole diameter we suggest:
cable diameter + approx. 15-20%

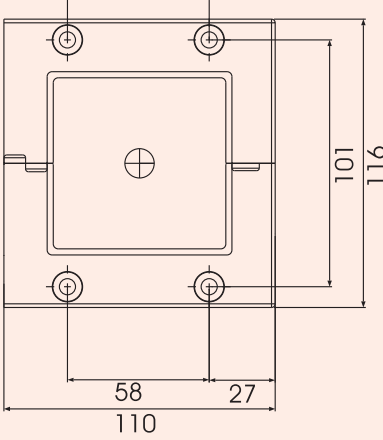
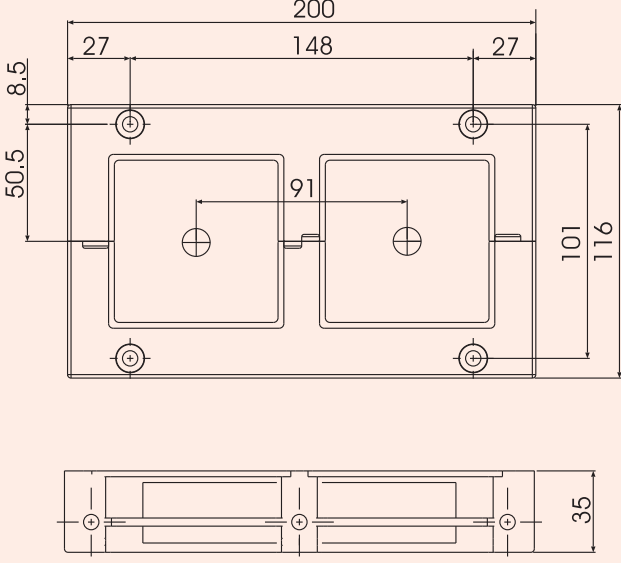
KEL-JUMBO cables up to 65 mm



Specification:

Material KEL-JUMBO Frame: Polyamide
Inserts: Elastomer, Protection to IP 54,
UL-94 V0, self-extinguishing,
halogen-free, silicone-free

Type	Order No.	Clamping range in mm	PU
KEL-Jumbo 1 without insert	42360	–	1
KEL-Jumbo 2 without insert	42350	–	1
KTF 00 Blind insert	42371	–	1
KTA Adapter inserts	42370	–	1
KTF 34	42376	33 - 36	1
KTF 38	42379	37 - 40	1
KTF 42	42382	41 - 44	1
KTF 46	42385	45 - 48	1
KTF 50	42388	48 - 52	1
KTF 54	42391	53 - 56	1
KTF 58	42394	56 - 60	1
KTF 62	42397	61 - 65	1

Description	Type	Order No.	Dimension in mm	PU
	KEL-JUMBO 1	42360	110 x 116	1
	KEL-JUMBO 2	42350	200 x 116	1



KEL-Jumbo-Flex for cables up to 68

Pat. pend.



The KEL Jumbo Flex is a very flexible cable entry system for non-prefabricated cables with diameters of 27 to 68 mm, the KEL-Jumbo-Flex can preferably be used to insert the power supply cable into the circuit cabinet.

The inserts themselves are identified with the corresponding diameters. We recommend cutting the inserts at the following point: cable diameter in mm minus approx. 5 mm. We recommend a round cut-off at the circuit cabinet (cable diameter plus 20%).

In any case we recommend, like with conventional cable glands with these clamping ranges, to also relieve strain by using a clamping ring.

Advantages:

- Highest flexibility
- Small installation dimensions of 88 x 88 mm
- Very affordable solution
- Ideal when diameters of cables to be inserted are first known on site

KEL-Jumbo-Flex				
Description	Type	Order No.	Clamping range in mm	PU
	KEL-Jumbo-Flex 27-48	42614	27 - 48	1
	KEL-Jumbo-Flex 47-68	42616	47 - 68	1

Specification:
 KEL-Jumbo-Flex frames: Polyamide
 KEL-Jumbo-Flex inserts: Elastomer, Protection IP54,
 UL-94 V0, self-extinguishing, halogen-free, silicone-free