

KEL-QUICK cable entry frames

Compact system for pre-terminated cable entry – screw-free assembly



Connection technology for wiring of machinery and plant

- Connection of half shells without screws
- Quick and safe assembly of pre-terminated cables
- Standardised cut-out size, 16- and 24-pole heavy connectors, e.g. Harting, Wieland
- Applicable to any wall thickness

Cable entry inserts for KEL-Quick-System

	Description	Type	Order No.	No. of inserts	PU
<p>KEL-Quick B2/B4 dimension</p>		KEL-Quick B/2	42430	2	10
<p>KEL-Quick 16 dimension</p>		KEL-Quick B/4	42434	4	10
<p>KEL-Quick 24 dimension</p>		KEL-Quick 16/4	42414	4	10
		KEL-Quick 16/8	42418	8	10
		KEL-Quick 24/5	42415	5	10
		KEL-Quick 24/10	42410	10	10

Specification:
 Material KEL-Quick frame: Polyamide
 Material QT inserts: Elastomer, protection to IP 54,
 UL-94 V0, self-extinguishing, halogen-free, silicone-free

Cable entry inserts for KEL-Quick-System



Type	Order No.	Clamping range	PU
QT 3	42503	3 – 4 mm	10
QT 4	42504	4 – 5 mm	10
QT 5	42505	5 – 6 mm	10
QT 6	42506	6 – 7 mm	10
QT 7	42507	7 – 8 mm	10
QT 8	42508	8 – 9 mm	10
QT 9	42509	9 – 10 mm	10
QT 10	42510	10 – 11 mm	10
QT 11	42511	11 – 12 mm	10
QT 12	42512	12 – 13 mm	10
QT 13	42513	13 – 14 mm	10
QT 14	42514	14 – 15 mm	10
QT 2/3	42566	3 – 4 mm	10
QT 2/4	42568	4 – 5 mm	10
QT 2/5	42570	5 – 6 mm	10
QT 2/6	42572	6 – 7 mm	10
QT 4/3	42580	3 – 4 mm	10
QT 4/4	42582	4 – 5 mm	10
QT 4/5	42584	5 – 6 mm	10
QT-ASI 1	42573	ASI-insert single type	10
QT-ASI 2	42574	ASI-insert double type	10
QTB	42540	Blind insert	10

Specification:

Material: Elastomer
 UL-94 V0, self-extinguishing,
 halogen-free, silicone-free,
 protection to IP 54



You can find the fitting snap frame on page 13.




QUICK-PIN

For quick fastening of KEL-Quick we developed QUICK-PIN. The expansion pins are pressed into the existing bore holes (diameter 5.2 to 5.5mm). Afterwards the flat gasket is mounted (included in delivery of KEL-QUICK).

Now the KEL-QUICK-frame is put on its mounting-position and is fastened with the QUICK- PIN e.g. onto the door of the control cabinet.

The threaded pins are pushed-in with firm thumb-pressure. For loosening of the connection, a crosstip screwdriver suffices.

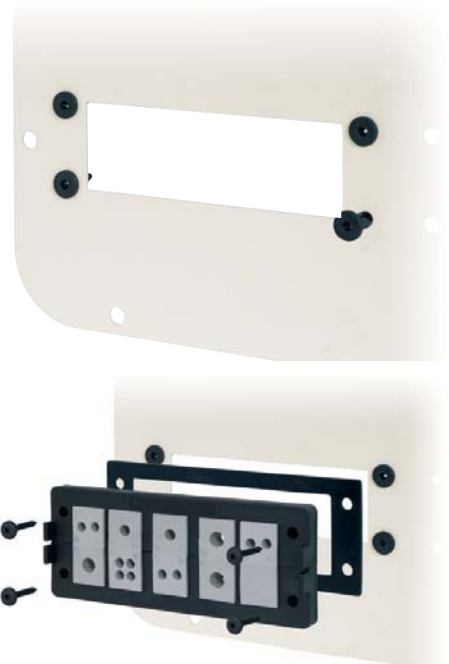

Quick-Pin fastening set

Type	Order No.	PU
Quick-pin fastening set	42405	40