


Remote Switch IK 8800, IL 8800

Translation
of the original instructions

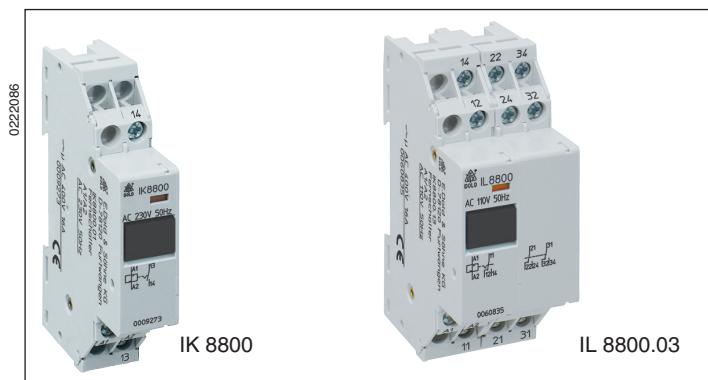


Your Advantages

- Optionally with up to max. 4 changeover contacts
- Low energy consumption by impulse operation
- Small amount of wiring required at installations with several local push buttons

Features

- According to IEC/EN 60 669
- Impulse operation
- Pushbutton for manual actuation of the contacts
- Operating position display
- Optionally contacts with up to a maximum of 4 changeover contacts
- Width 17.5 mm or 35 mm

Circuit Diagram

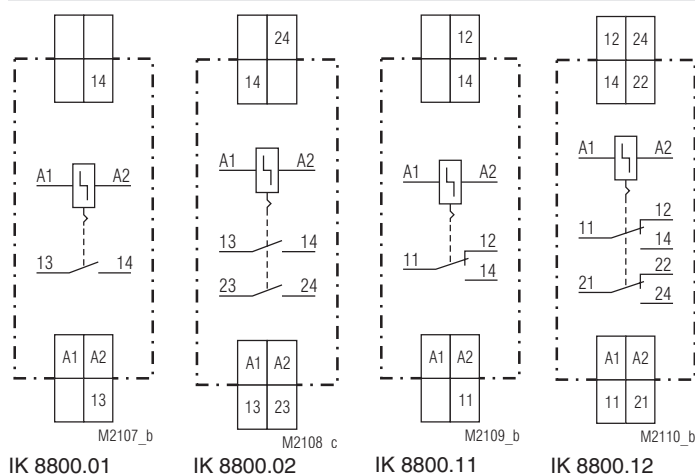


IK 8800.01

IK 8800.02


IK 8800.11

IK 8800.12

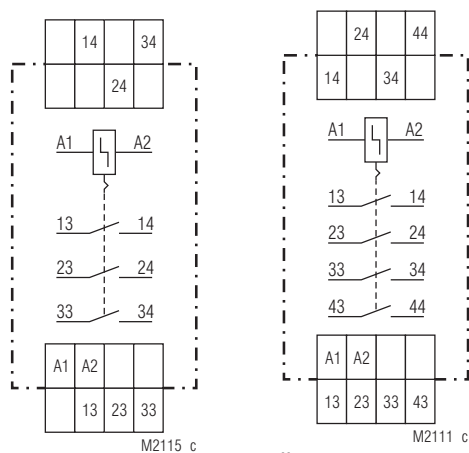

IL 8800.03

IL 8800.04

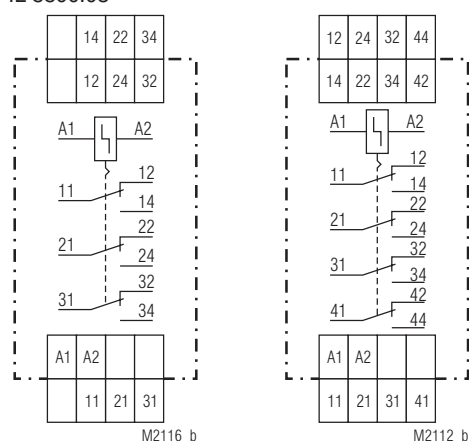

IL 8800.13

IL 8800.14

Approvals and Markings



Function

The contacts are actuated with every current pulse and they stay in the operating position they have adopted in each case until the next pulse occurs. It is possible to actuate the contacts manually by pressing a pushbutton provided on the unit. The contact position is shown by an indicator. The units can be installed in rows close next to each other for pulse operation. The gap between the relays is 7 mm when they are on permanently.

Indicators

red indicator: is visible when output contacts are activated

Connection Terminals

Terminal designation	Signal description
A1	Control signal L resp. DC+
A2	neutral N resp. DC-
13/14, 23/24, 33/34, 43/44	NO contact LOAD
11/12/14, 21/22/24, 31/32/34, 41/42/44	C/O LOAD


Technical Data	
Input	
Nominal voltage U_N:	AC 8, 24, 42, 230 V DC 12, 24 V, other voltages on request
Voltage range:	0.9 ... 1.1 U_N
Nominal consumption:	1.2 contacts 4 contacts
apparent power:	5.2 VA 10.4 VA
actual power:	4.2 W 8.4 W
Nominal frequency:	50 or 60 Hz
Frequency range:	± 5 %
Glow lamp parallel to the pushbutton:	Max. 8 lamps à 0.5 mA (corresponds to 4 mA residual current)
Minimum on time	> 50 ms
Output	
Contacts	
IK 8800.01:	1 NO contact
IK 8800.02:	2 NO contacts
IL 8800.03:	3 NO contacts
IL 8800.04:	4 NO contacts
IK 8800.11:	1 changeover contact
IK 8800.12:	2 changeover contacts
IL 8800.13:	3 changeover contacts
IL 8800.14:	4 changeover contacts
Operate time:	< 30 ms
Nominal output voltage:	AC 230 V / 400 V
Electrical life	
with resistive load AC 230 V and 500 switching cycles / h:	6 A 150 x 10 ⁴ switching cycles 10 A 75 x 10 ⁴ switching cycles 16 A 10 x 10 ⁴ switching cycles
Switching capacity with lamp load:	
fluorescent lamp load:	20 lamps with 58 W / contact each
with electronic series reactor: duo circuit	58 lamps with 18 W / contact each
(series compensated):	2 x 20 lamps with 58 W / contact each 5 x 10 ⁴ switching cycles The starting current levels can be very high in parallel compensation configurations and when electronic ballast units are being used. Automatic fuses must be incorporated in the circuit if necessary.
bulb load:	2000 W 5 x 10 ⁴ switching cycles
Nominal switching-off capacity:	
cos. φ 1 ... 0.7, AC 230 V:	16 A
Thermal current I_{th}:	16 A
Permissible switching frequency:	1000 switching cycles / h
Short circuit strength	
max. fuse rating:	16 A gG / gL IEC/EN 60947-5-1
Mechanical life:	3 x 10 ⁶ switching cycles

Technical Data	
General Data	
Operating mode:	Pulse operation in case of failure 100 % to duty cycle possible
Temperature range	
Operation:	- 20 ... + 45°C
Storage:	- 25 ... + 55°C
Altitude:	< 2000 m
Clearance and creepage distances	
rated impulse voltage / pollution degree:	4 kV / 2 IEC 60664-1
EMC	
Electrostatic discharge:	8 kV (air) IEC/EN 61000-4-2
HF-Einstrahlung:	
80 MHz ... 2.7 GHz:	10 V / m IEC/EN 61000-4-3
Fast transients:	4 kV IEC/EN 61000-4-4
Surge voltages between	
wires for power supply:	1 kV IEC/EN 61000-4-5
between wire and ground:	2 kV IEC/EN 61000-4-5
HF wire guided:	10 V IEC/EN 61000-4-6
Interference suppression:	Limit value class B EN 55011
Degree of protection:	
Housing:	IP 30 IEC/EN 60529
Terminals:	IP 20 IEC/EN 60529
Housing:	Thermoplastic with V0 behaviour according to UL subject 94
Vibration resistance:	Amplitude 0.35 mm frequency 10 ... 55 Hz IEC/EN 60068-2-6
Climate resistance:	Humid heat IEC/EN 60068-2-30
Terminal designation:	EN 50005
Wire connection:	2 x 2.5 mm ² solid or 2 x 1.5 mm ² stranded ferruled DIN 46228-1/-2/-3/-4 or 2 x 1 mm ² stranded ferruled DIN 46228-1/-2/-3/-4 Flat terminals with self-lifting clamping piece IEC/EN 60999-1 0.8 Nm DIN rail IEC/EN 60715
Wire fixing:	
Fixing torque:	
Mounting:	
Weight	
IK 8800:	110 g
IL 8800:	210 g
Dimensions	
Width x height x depth	
IK 8800:	17.5 x 89 x 58 mm
IL 8800:	35 x 89 x 58 mm

Standard Type	
IK 8800.01 AC 230 V 50 Hz	
Article number:	0009273
• Output:	1 NO contact
• Nominal voltage U_N :	AC 230 V
• Width:	17.5 mm

Variant

Ordering Example for Variant

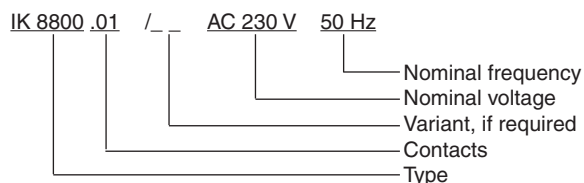



Safety Notes




Dangerous voltage.
Electric shock will result in death or serious injury.




Disconnect all power supplies before servicing equipment.

- Faults must only be removed when the relay is disconnected
- The device may only be installed and put into operation by experts who are familiar with this technical documentation and the applicable health and safety and accident prevention regulations.
- The user has to make sure that the device and corresponding components are installed and wired according to the local rules and law (TUEV, VDE, Health and safety).
- Installation work must only be done when power is disconnected

Connection Examples

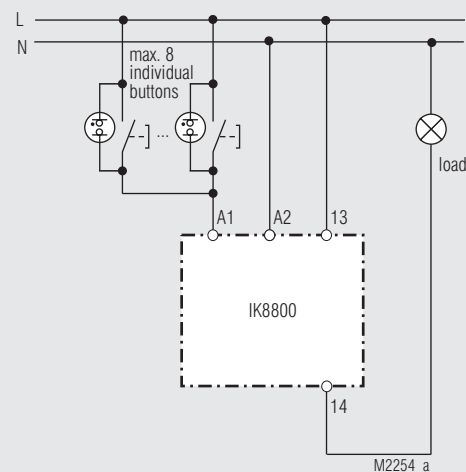

This circuit can be used with up to 8 illuminated pushbuttons.

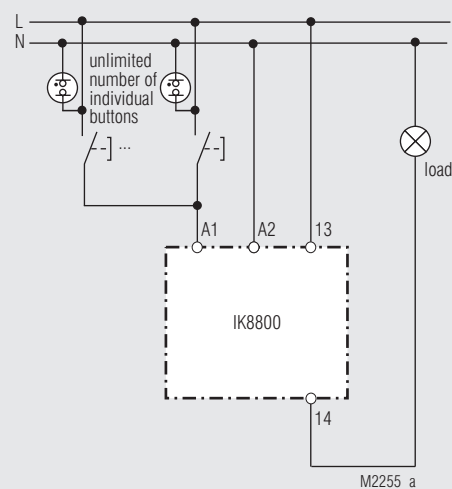

With this circuit it is possible to connect as many illuminated pushbuttons as required to a remote switch.

When low voltages are being used, the control circuit has to be disconnected from the mains system by means of a transformer. It is only possible to illuminate the pushbuttons here by providing a third control wire.

